



**SHORTER & LESS BULKY  
EASY TO USE AND INSTALL  
COST-EFFECTIVE**

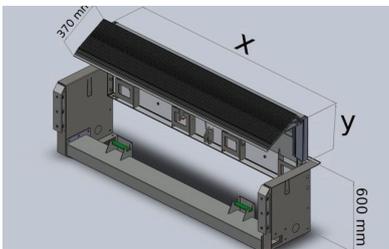

### Details

- Surrounding profile with galvanised steel sides, back and lip-base (optional for INOX)
- 6000 kg capacity aluminum plate with anti-slip cross-ribbing
- Hinged lip in one piece 370 mm long with extruded joint between lip and plate.
- TAM3F standard rubber bumpers
- Perfectly fitting with H.A.A.C.P. rules
- CE certificated model
- Lifting and positioning assistance gas spring..
- POSITIONING THROUGH RIGID STEEL REMOVABLE SIDE-HANDLE

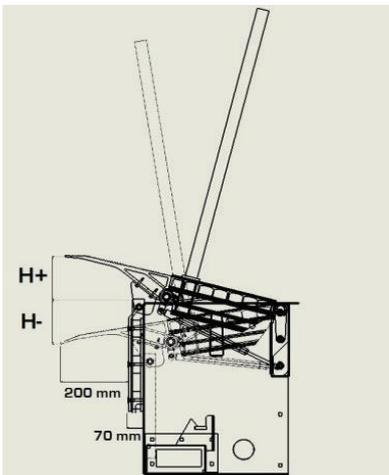

Optional: OVERBAY INSTALLATION STRUCTURE the structure is to be welded to a U profile already put into the loading bay border during concrete cast

CODE	X	Y	H+ / H-	WEIGHT
MR480B-MAN	2000	480+LIP	110 / 110	170